



**VECTRONIX
SHOOTING
SOLUTIONS.**



VECTOR X 42 TECHNICAL DATA

	VECTOR X 8×42	VECTOR X 10×42	VECTOR X 12×42
Order numbers (for EU only)	918821 with MSR-DMR ¹ reticle 918820 with MSR-SMR ² reticle	918823 with MSR-DMR ¹ reticle 918822 with MSR-SMR ² reticle	918825 with MSR-DMR ¹ reticle 918824 with MSR-SMR ² reticle

Optics	VECTOR X 8×42	VECTOR X 10×42	VECTOR X 12×42
Observation	DVO, binocular	DVO, binocular	DVO, binocular
Objective lens diameter	42mm	42mm	42mm
Magnification	8×	10×	12×
Reticles	MSR-DMR ¹ MSR-SMR ²	MSR-DMR ¹ MSR-SMR ²	MSR-DMR ¹ MSR-SMR ²
Field of view at 1000yd/1000m in degrees	387 ft/130m 7.4°	330 ft/110m 6.3°	272 ft/91m 5.2°
Field of view with Range Enhancers 42 at 1000yd/1000m in degrees	277 ft/92m 5.3°	236 ft/79m 4.5°	194 ft/65m 3.7°
Exit pupil	5.25mm	4.2mm	3.5mm
Eye-relief	18mm	17mm	17mm
Interpupillary distance	58 to 78mm	58 to 78mm	58 to 78mm
Diopter compensation	±4dpt.	±4dpt.	±4dpt.
Nano coating on outer lenses	Yes	Yes	Yes
Twilight number	18.3	20.5	22.45

Rangefinder	VECTOR X 8×42	VECTOR X 10×42	VECTOR X 12×42
Laser type	905nm, class 1 according to IEC 60825-1	905nm, class 1 according to IEC 60825-1	905nm, class 1 according to IEC 60825-1
Range capability			
max range	3yd/2m to 4400yd/4000m	3yd/2m to 4400yd/4000m	3yd/2m to 4400yd/4000m
tree	3yd/2m to 2740yd/2500m	3yd/2m to 2740yd/2500m	3yd/2m to 2740yd/2500m
deer	3yd/2m to 1970yd/1800m	3yd/2m to 1970yd/1800m	3yd/2m to 1970yd/1800m
Specified performance	2900yd/2650m on 2.3m × 2.3m target; visibility: 10km, albedo 0.6, detection probability >90%	2900yd/2650m on 2.3m × 2.3m target; visibility: 10km, albedo 0.6, detection probability >90%	2900yd/2650m on 2.3m × 2.3m target; visibility: 10km, albedo 0.6, detection probability >90%
Accuracy	±1m at 9m to 100m ±2m at 100m to 500m <0.5% of distance beyond 500m	±1m at 9m to 100m ±2m at 100m to 500m <0.5% of distance beyond 500m	±1m at 9m to 100m ±2m at 100m to 500m <0.5% of distance beyond 500m
False alarm rate	<2%	<2%	<2%
Beam divergence	0.6 × 0.1mrad	0.6 × 0.1mrad	0.5 × 0.1mrad
Time per measurement	<0.25sec	<0.25sec	<0.25sec

Communication interface	VECTOR X 8×42 / VECTOR X 10×42 / VECTOR X 12×42
Wireless	Bluetooth® 5.1 LowEnergy

¹ optimized for usage with Range Enhancers 42

² optimized for usage without Range Enhancers 42

Physial	VECTOR X 8×42	VECTOR X 10×42	VECTOR X 12×42
Housing	magnesium	magnesium	magnesium
Armoring	shock absorbing rubber	shock absorbing rubber	shock absorbing rubber
Colour	tac-grey	tac-grey	tac-grey
Tripod	¼"-20 UNC standard tripod interface	¼"-20 UNC standard tripod interface	¼"-20 UNC standard tripod interface
Dimensions	163mm × 130mm × 65mm	156mm × 130mm × 65mm	169mm × 130mm × 65mm
Weight without battery	~1013g/~35oz	~977g/~34oz	~1015g/~36oz
Front objective thread	M46 × 0.75	M46 × 0.75	M46 × 0.75
Ballistics VECTOR X 8×42 / VECTOR X 10×42 / VECTOR X 12×42			
Internal ballistics	Applied Ballistics® Elite		
External ballistics	Applied Ballistics®, Hornady 4DOF®, Trasol		
Kestrel	5700 Elite, 5700X Elite, 5700 Hornady 4DOF®		
Garmin ballistic watches	Foretrex® 701/901, tactix® Delta, tactix® 7, instinct® 2X, Descent Mk 2i, Marq Commander Carbon, D2 Mach 1 Pro, etc.		
Mapping VECTOR X 8×42 / VECTOR X 10×42 / VECTOR X 12×42			
Maps	Google Maps, BaseMap, CivTAC (plug-in required)		
Mobile App VECTOR X 8×42 / VECTOR X 10×42 / VECTOR X 12×42			
Available for	iOS, Android		
Digital magnetic compass and sensors VECTOR X 8×42 / VECTOR X 10×42 / VECTOR X 12×42			
Units	360°/6283mrad/6400mil		
Azimuth accuracy (15)	±5°		
Maximum inclination	±89°/±1553mrad/±1582mil		
Declination, adjustable	±179°		
Others VECTOR X 8×42 / VECTOR X 10×42 / VECTOR X 12×42			
Temperature sensor	-20°C/-4°F to +50°C/122°F		
Barometric pressure sensor	300hPa to 1100hPa		
Display VECTOR X 8×42 / VECTOR X 10×42 / VECTOR X 12×42			
Type	AMOLED microdisplay		
Brightness control	automatic/manual		
Power supply VECTOR X 8×42 / VECTOR X 10×42 / VECTOR X 12×42			
Standard, on-board	1 × 3V lithium battery (CR123A)		
Battery capacity	(20°C) >10000 measurements		
Rechargeable battery (optional)	Type 18650		


Environmental	VECTOR X 8×42 / VECTOR X 10×42 / VECTOR X 12×42
Protection class	IP67 (waterproof 1m 30min)
Operational temperature	-20°C/68°F to +50°C/122°F
Storage temperature	-40°C/104°F to +70°C/158°F
Shock	60g/6ms
Vibration	2g; 10Hz to 150Hz

Accessories	VECTOR X 8×42 / VECTOR X 10×42 / VECTOR X 12×42	Part number
Range Enhancers 42 [1.4×] incl. protective case		917239 (2 pcs)
Anti-Reflection Devices 42		917806 (2 pcs)

Spare parts	VECTOR X 8×42 / VECTOR X 10×42 / VECTOR X 12×42	Part Number
Eyecup for 8×42		919007 (1 pc)
Eyecup for 10×42/12×42		919008 (1 pc)
Neck strap		917231 (1 pc)
Front lens flip cover 42		917232 (1 pc)
Range Enhancer 42 [1.4×]		918795 (1 pc)
Lens cover set for Range Enhancers 42		919011 (2 pcs)
Eyepiece cover		919004 (1 pc)
Protective case 42		917801 (1 pc)
Tripod adapter incl. screws and torx key		917802 (1 pc)
Tripod cover VECTOR X		919050 (1 pc)
Battery cover CR123A		919003 (1 pc)
Battery cover 18650		919052 (1 pc)
Clip for battery compartment cover incl. cord		919009 (1 pc)

Scope of delivery	VECTOR X 8×42 / VECTOR X 10×42 / VECTOR X 12×42
	Laser rangefinder binocular, neck strap, 2× front lens flip cover 42, eyepiece cover, protective case 42, tripod adapter incl. screws and torx key, additional battery cover 18650, CR123A 3V battery, VECSS logo patch, lens cleaning cloth, quickstart guide, safety instructions;

MSR-DMR reticle optimized for usage with Range Enhancers 42

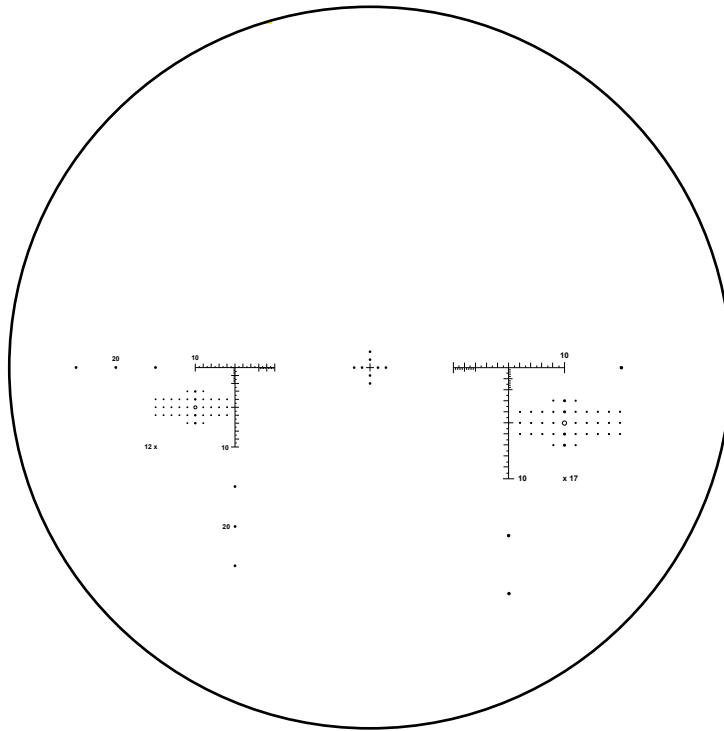

MSR-SMR reticle optimized for usage without Range Enhancers 42

